

## Product data sheet – SawTec

### Product description

SawTec is a wood screw with special screw tip and saw teeth under the head. The screw has a two-stage cylinder head.

The special geometry of the screw tip reduces screw-in torque and also avoids splitting effect when screwing in.

### Material

Hardened carbon steel, electro-galvanised


- For use in service classes 1 and 2 in accordance with DIN EN 1995 - Euro-code 5

### Advantages

- Quicker and easier screwing in with DAG tip
- DAG tip reduces screw-in torque
- Lower splitting effect
- European Technical Approval
- Saw teeth under the head reduce chipping
- TX drive prevents screws from knocking when screwed in

### Certification

- European Technical Assessment ETA-11/0024 -Self-tapping screws as wood fasteners



## Product data sheet – SawTec

## Product table

SawTec, blue zinc-plated					
Art. no.	Dimensions Ød x L [mm]	Thread length lg [mm]	Head diameter Ødh [mm]	Drive	PU
954115	5,0 x 40	24	10,5	TX25	200
954117	5,0 x 50	30	10,5	TX25	200
954118	5,0 x 60	36	10,5	TX25	200
954119	5,0 x 70	42	10,5	TX25	200
954120	5,0 x 80	48	10,5	TX25	200
954121	5,0 x 90	54	10,5	TX25	200
954122	5,0 x 100	60	10,5	TX25	200
954124	5,0 x 120	60	10,5	TX25	200

SawTec, blue zinc-plated					
Art. no.	Dimensions Ød x L [mm]	Thread length lg [mm]	Head diameter Ødh [mm]	Drive	PU
954128	6,0 x 60	36	13,0	TX30	100
954129	6,0 x 70	42	13,0	TX30	100
954130	6,0 x 80	48	13,0	TX30	100
954131	6,0 x 100	60	13,0	TX30	100
954133	6,0 x 120	60	13,0	TX30	100
954135	6,0 x 140	70	13,0	TX30	100
954137	6,0 x 160	70	13,0	TX30	100
954138	6,0 x 180	70	13,0	TX30	100


## Product data sheet – SawTec

SawTec, blue zinc-plated					
Art. no.	Dimensions Ød x L [mm]	Thread length lg [mm]	Head diameter Ødh [mm]	Drive	PU
954145	8,0 x 80	48	18,0	TX40	50
954146	8,0 x 100	60	18,0	TX40	50
954147	8,0 x 120	60	18,0	TX40	50
954148	8,0 x 140	95	18,0	TX40	50
954149	8,0 x 160	95	18,0	TX40	50
954150	8,0 x 180	95	18,0	TX40	50
954151	8,0 x 200	95	18,0	TX40	50
954152	8,0 x 220	95	18,0	TX40	50
954153	8,0 x 240	95	18,0	TX40	50
954154	8,0 x 260	95	18,0	TX40	50
954155	8,0 x 280	95	18,0	TX40	50
954156	8,0 x 300	95	18,0	TX40	50
954157	8,0 x 320	95	18,0	TX40	50
954158	8,0 x 340	95	18,0	TX40	50
954159	8,0 x 360	95	18,0	TX40	50
954160	8,0 x 380	95	18,0	TX40	50
954161	8,0 x 400	95	18,0	TX40	50

SawTec, blue zinc-plated					
Art. no.	Dimensions Ød x L [mm]	Thread length lg [mm]	Head diameter Ødh [mm]	Drive	PU
954162	10,0 x 100	60	22,0	TX50	50
954163	10,0 x 120	60	22,0	TX50	50
954164	10,0 x 140	95	22,0	TX50	50
954165	10,0 x 160	95	22,0	TX50	50
954166	10,0 x 180	95	22,0	TX50	50
954167	10,0 x 200	95	22,0	TX50	50
954168	10,0 x 220	95	22,0	TX50	50
954169	10,0 x 240	95	22,0	TX50	50
954170	10,0 x 260	95	22,0	TX50	50
954171	10,0 x 280	95	22,0	TX50	50
954172	10,0 x 300	95	22,0	TX50	50
954173	10,0 x 320	95	22,0	TX50	50
954174	10,0 x 340	95	22,0	TX50	50
954175	10,0 x 360	95	22,0	TX50	25
954176	10,0 x 380	95	22,0	TX50	25
954177	10,0 x 400	95	22,0	TX50	25

## Product data sheet – SawTec

### Drawing

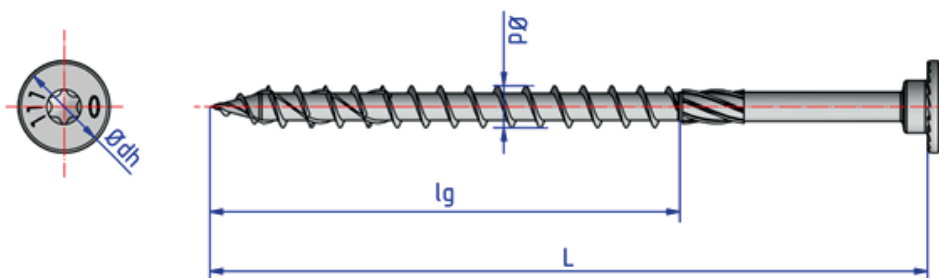

### Application image



If you are not familiar with the application of the product at hand, especially with the handling according to given regulations, it is essential to get in contact with our technical application support department (Technik@eurotec.team).