

by phone 02331 6245-444 · by fax 02331 6245-200 · by e-mail [technik@eurotec.team](mailto:technik@eurotec.team)

Please contact our technical department or use the free calculation services in the service section of our website.

### Contact

Trader:	_____	Contractor:	_____
Contact Person:	_____	Contact Person:	_____
email:	_____	Phone:	_____
Project:	_____	email:	_____

### Project details

#### Main Beam

Width: \_\_\_\_\_ mm

Height: \_\_\_\_\_ mm


Strength class: \_\_\_\_\_  
(e.g. C24, GL24h etc.)

#### Secondary Beam

Width: \_\_\_\_\_ mm

Height: \_\_\_\_\_ mm

Strength class: \_\_\_\_\_  
(e.g. C24, GL24h etc.)

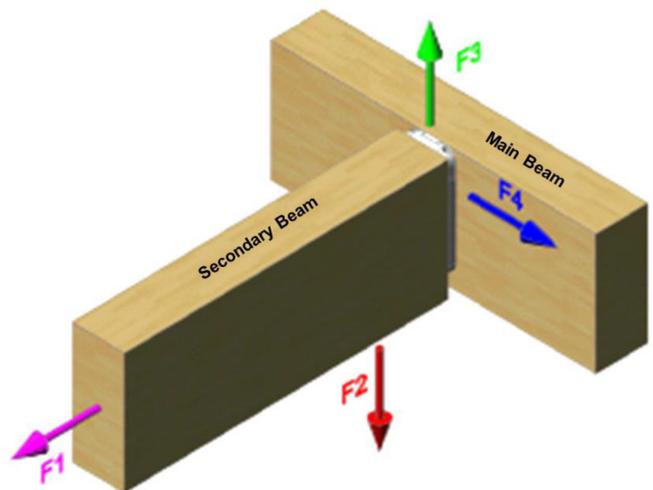

- F1** – Proportion of permanent load: \_\_\_\_\_ kN
- Proportion of variable load: \_\_\_\_\_ kN
- F2** – Proportion of permanent load: \_\_\_\_\_ kN
- Proportion of variable load: \_\_\_\_\_ kN
- F3** – Proportion of permanent load: \_\_\_\_\_ kN
- Proportion of variable load: \_\_\_\_\_ kN
- F4** – Proportion of permanent load: \_\_\_\_\_ kN
- Proportion of variable load: \_\_\_\_\_ kN

#### Loads (Characteristic values)

Load duration class

- Permanent    Long    Medium    Short

#### Installation

- Surface assembly
- Embedded in secondary beam
- Embedded in main beam

### Selection of Magnus

- XS 30 x 30    S 50 x 60/80/100    M 70 x 120/140/160/180    L 110 x 220/260/300/340/380/580