

* Calculation for fastening counter battening to support the wind load and dead weight. The screws do not serve to secure the insulation itself.

by phone 02331 6245-444 · by fax 02331 6245-200 · by e-mail technik@eurotec.team

Please contact our technical department or use the free [calculation services](#) in the service section of our website.

Contact

Trader: _____ Contractor: _____

Contact person: _____ Contact person: _____

e-mail: _____ Phone: _____

Project: _____ e-mail: _____

Project details

Post code: _____

Basis weight facade: _____ kg/m²
(incl. battens)


Insulation thickness: _____ mm
(80 mm ≤ T ≤ 280 mm)

Subsurface: _____ m

Timber (min. C24) Building brick

Concrete Sand-lime brick

Lightweight concrete
(not cellular concrete) Perforated brick

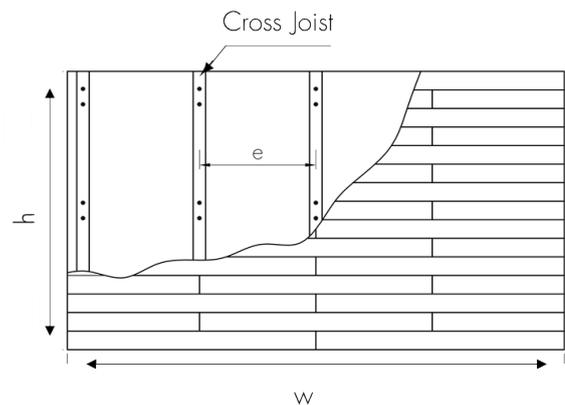

Wall thickness: _____ mm
(or cross section of subsurface; solid wall min. 17,5 cm thick; timber studs min. 8 wide)

Cross-joist cross section: _____ mm
(min. 40x60 mm; min. C24)

Cross-joist spacing e: _____ mm

Length of cross joist: _____ m
(Length of actually installed batten pieces)

Facade geometry
(Facade height max. 8,00 m)

Field 1	H: _____ m	W: _____ m	Field 3	H: _____ m	W: _____ m
Field 2	H: _____ m	W: _____ m	Field 4	H: _____ m	W: _____ m