

Wood-concrete composite structure TopConcreteby phone 02331 6245-444 · by fax to 02331 6245-200 · by email to technik@eurotec.teamContact our Technical department or use the free calculation software in the Service area on our homepage: <https://www.eurotec.team/en/service>**Contact**

Retailers: _____

Executing party: _____

Contact person: _____

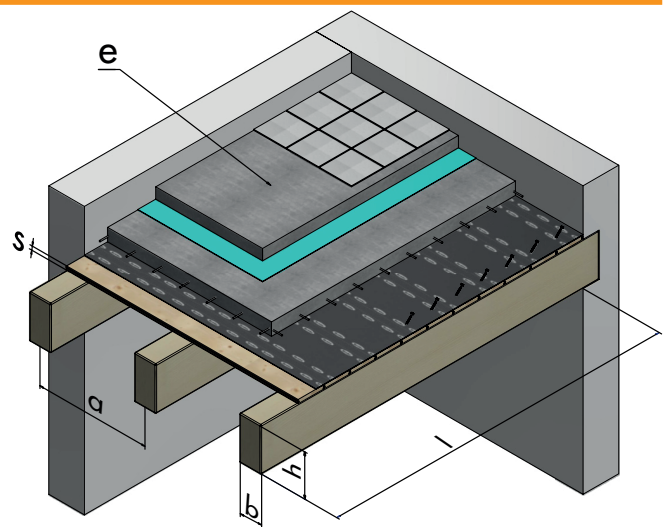
Contact person: _____

Email: _____

Tel: _____

Building project: _____

Email: _____

Information about the supporting structureh (mm): _____
(Height of the wooden beam)w (mm): _____
(Width of the wooden beam)a (mm): _____
(Largest centre-to-centre distance of the wooden beam)l (mm): _____
(Span clearance)s (mm): _____
(Formwork thickness if present)**Information about the supporting structure**

e Design and dimension of the planned further floor structure

Screed (mm): _____
(Type: e.g. cement/asphalt/dry screed)

Insulating layer (mm): _____

Flooring (mm): _____
(Type: e.g. tiles, parquet, laminate)

Separating wall addition for walls (including plaster) with a load of:

≤ 3 kN/m wall length 0.8 kN/m² ☐> 3 kN/m ≤ 5 kN/m wall length 1.2 kN/m² ☐**Information about other loads**

Loads under the ceiling, e.g. suspended ceilings: _____

Information about the fire stress☐ R30☐ R60☐ R90☐ R120**Information about use as per DIN EN 1991-1**☐ Living area / office space☐ Sales space☐ Meeting room

Note: A preliminary measurement cannot be used to perform the work. The preliminary measurement only relates to the TCC-Integral method from Eurotec that has been approved by the building authorities.
Calculation according to EC 5/DIN EN 1995 and EC 2/DIN EN 1992.

Reference: information on the processing of your personal data can be found at the following link:
<https://www.eurotec.team/en/data-protection>

Wood-concrete-composite supporting structure request pre-measurement EuroTec © as of 08/2025