

by phone 02331 6245-444 · by fax 02331 6245-200 · by e-mail technik@eurotec.team

 Please contact our technical department or use the free calculation services in the service section of our website: <https://www.eurotec.team/en/service>

Contact

Trader:	_____	Contractor:	_____
Contact Person:	_____	Contact Person:	_____
email:	_____	Phone:	_____
Project:	_____	email:	_____

Project details

Main Beam

Width: _____ mm

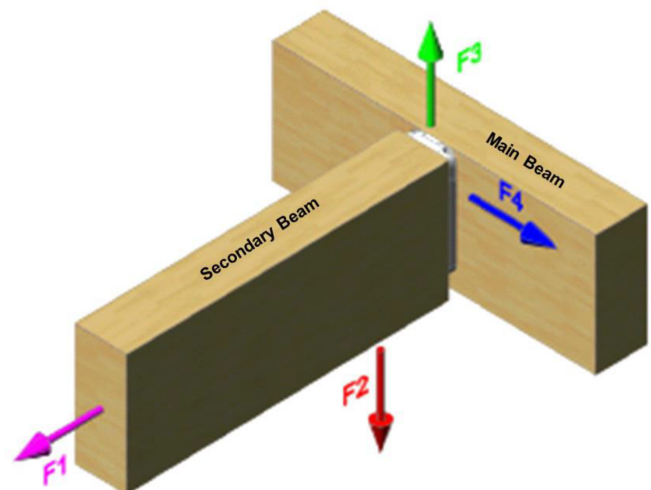
Height: _____ mm

 Strength class: _____
 (e.g. C24, GL24h etc.)

Secondary Beam

Width: _____ mm

Height: _____ mm

 Strength class: _____
 (e.g. C24, GL24h etc.)

F1 – Proportion of permanent load: _____ kN

– Proportion of variable load: _____ kN

F2 – Proportion of permanent load: _____ kN

– Proportion of variable load: _____ kN

F3 – Proportion of permanent load: _____ kN

– Proportion of variable load: _____ kN

F4 – Proportion of permanent load: _____ kN

– Proportion of variable load: _____ kN

Loads (Characteristic values)

Load duration class

☐ Permanent ☐ Long ☐ Medium ☐ Short

Installation

- ☐ Surface assembly
- ☐ Embedded in secondary beam
- ☐ Embedded in main beam

Selection of Magnus

☐ XS 30 x 30 ☐ S 50 x 60/80/100 ☐ M 70 x 120/140/160/180 ☐ L 110 x 220/260/300/340/380/580