


# FASTENING RECOMMENDATION

## ITAÚBA (MEZILAURUS SPP.)

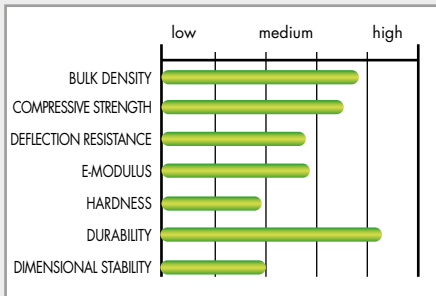

### ADVANTAGES

- + High durability
- + High resistance

### DISADVANTAGES

- Leaching of wood ingredients possible
- Often comes from overexploitation (if possible only certified wood use)
- Moderate hardness
- Moderate stamina

### GENERAL DETAILS

- **Origin:** South America
- **Colour:** Trade name includes various species, usually yellow-brown to dark brown, dark olive to golden brown darkening.
- **Durability class:** 1 – 2
- **Properties:** Medium to high swelling and shrinkage, satisfactory to moderate staying power. High strength. Homogeneous texture.

### APPLICATION

Terrace construction, bridge and ship building, noise and privacy walls, fences, structural timber, partly in hydraulic Hydraulic engineering



### INSTALLATION INSTRUCTIONS

- Centre distance in substructure: max. 60 cm
- Joint width between the boards: 6 to 10 mm
- Spacing between the butt joints: 3 to 4 mm



## FASTENING OPTIONS

### VISIBLE



Terrasotec Trilobular



Hapatec Heli



Profile drilling screw A4




Distance strip 2.0

# FASTENING RECOMMENDATION

## ITAÚBA

### BOARD CROSS SECTION

To guarantee a long service life for boards, a minimum board thickness should be chosen according to the centre distance for the substructure and the required board width. The following table shows the relevant recommendation for your board and the associated centre distance for the substructure.

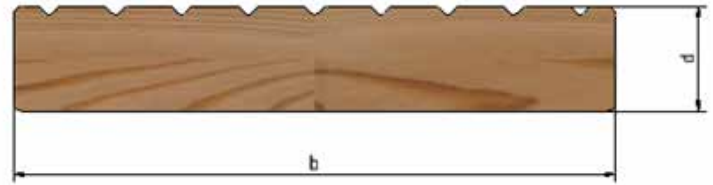


| Board width b [mm] | Spacing for the substructure [cm] |    |
|--------------------|-----------------------------------|----|
|                    | 50                                | 60 |
| 100                | 30                                | 32 |
| 120                | 27                                | 30 |
| 140                | 25                                | 27 |
| 160                | 23                                | 26 |

### MAXIMUM SPACING FOR THE SUBSTRUCTURE

The correct spacing of the substructure is important to ensure the plank load-bearing capacity.


Our recommendation here is a **maximum distance of 60 cm** for Itaúba decking boards.

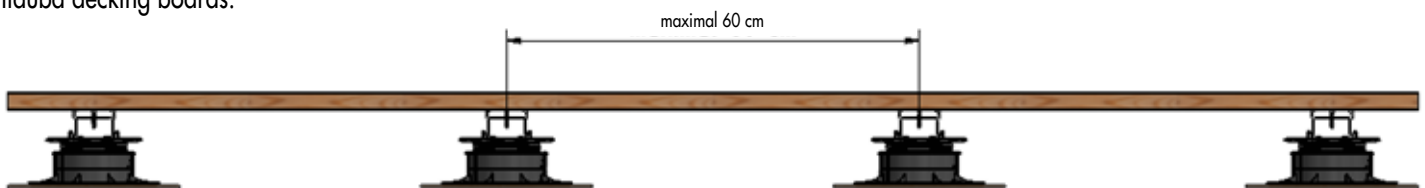

### JOINT WIDTHS

Given that wood swells and shrinks most in the width of the board, correct joint width is key to the life of a terrace.

For a terrace with Itaúba planks, we recommend a **joint width of 6 to 8 mm**.

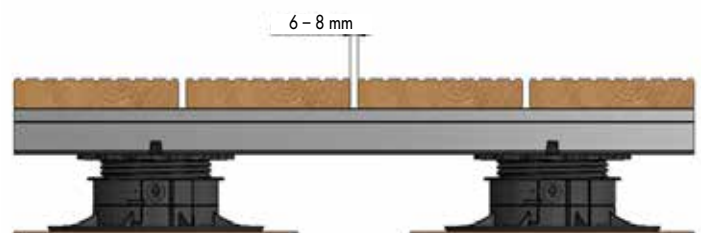


# FASTENING RECOMMENDATION

## ITAÚBA

### BOARD JOINTS

Not only is it necessary to incorporate board joints in the planning of a substructure, but also to implement them correctly so that the timber can swell and shrink, thereby retaining the visual appearance of the terrace while preventing damage.

For Itauba, we recommend a distance for the plank joints of **3 – 4 mm** not to be under or exceeded.

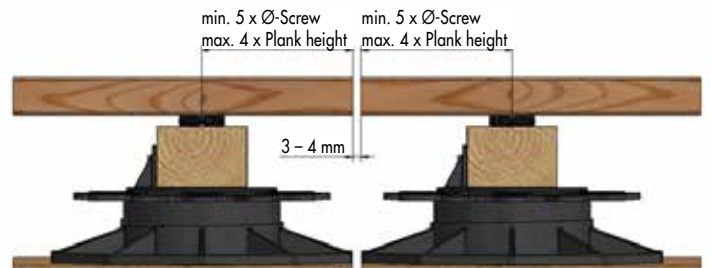

### PRE-DRILLING

When building a terrace with wooden planks made of Itauba, pre-drilling and countersinking is absolutely recommended. These tend to crack easily and there is a risk of splitting, which is prevented by pre-drilling. The additional countersinking significantly minimises the possibility of chip build-up around the screw head and ensures a more attractive screw pattern.



| Art. no. | Name       | PU |
|----------|------------|----|
| 945986   | Drill-Stop | 1  |

### POSSIBLE FASTENINGS FOR YOUR BOARDS

Decking boards made of Itauba are not suitable for indirect fastening due to their high swelling and shrinkage behaviour. Therefore, we only recommend products for visible screw connection.

# VISIBLE FASTENING

## ITAÚBA


### SCREWS FOR DIRECT/VISIBLE FASTENING

#### TERRASOTEC TRILOBULAR, STAINLESS STEEL A4

The Terrasotec screw is designed for the fastening of wooden floorboards on a wooden substructure and is not suitable for fastening on an aluminium substructure.

| Art. no. | Dimensions [mm] | Drive | PU  |
|----------|-----------------|-------|-----|
| 905555   | 5,5 x 50        | TX25  | 100 |
| 905556   | 5,5 x 60        | TX25  | 100 |
| 905557   | 5,5 x 70        | TX25  | 100 |
| 905558   | 5,5 x 80        | TX25  | 100 |
| 905547*  | 5,5 x 90        | TX25  | 100 |
| 905548*  | 5,5 x 100       | TX25  | 100 |

\*The previous version will continue to be supplied until the switchover is complete.

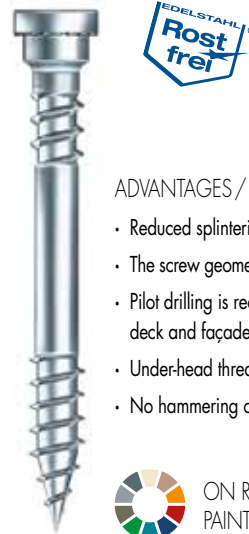

#### ADVANTAGES / PROPERTIES

- Reduced splintering through special head
- The screw geometry reduces the danger of splitting,
- Pilot drilling is recommended in particular for hardwoods and in deck and façade construction!
- Under-head thread provides additional hold for deck boards
- No hammering of the screws through TX drive



ON REQUEST, SCREW HEADS CAN BE PAINTED IN RAL COLOURS

### APPLICATION IMAGE



The Terrasotec Trilobular, stainless steel A4 is screwed into the Itaúba decking.

## VISIBLE FASTENING

## ITAÚBA

### HAPATEC HELI, A4

The Hapatec screw is designed for fixing wooden planks to a wooden substructure and is not suitable for fixing to an aluminium substructure.

| Art. no. | Dimensions [mm] | Drive | PU  |
|----------|-----------------|-------|-----|
| 100051   | 5,0 x 50        | TX25  | 200 |
| 100052   | 5,0 x 60        | TX25  | 200 |
| 100053   | 5,0 x 70        | TX25  | 200 |
| 100054   | 5,0 x 80        | TX25  | 200 |
| 100058   | 5,0 x 100       | TX25  | 200 |



#### ADVANTAGES / PROPERTIES

- Suitable for use with woods containing tanning agents such as cumarú, oak, merbau, robinia, etc.
- Suitable for saline atmospheres
- Limited resistance to acid
- Not suitable for use in chlorous atmospheres



ON REQUEST, SCREW HEADS CAN BE PAINTED IN RAL COLOURS

### APPLICATION IMAGE



The Hapatec, Heli A4 is screwed into the Itaúba decking.

# VISIBLE FASTENING

## ITAÚBA

### PROFILE DRILLING SCREW, STAINLESS STEEL A4

The profile drilling screw is designed to fasten wooden boards to a substructure of aluminium profiles; it is not suitable for fastening boards to a wood substructure.

| Art. no. | Dimensions [mm] | Drive | Board thickness [mm] | PU  |
|----------|-----------------|-------|----------------------|-----|
| 905571   | 5,5 x 41        | TX25  | 16 – 20              | 200 |
| 905563   | 5,5 x 46        | TX25  | 21 – 25              | 200 |
| 905564   | 5,5 x 51        | TX25  | 26 – 30              | 200 |
| 975798   | 5,5 x 56        | TX25  | 31 – 35              | 200 |
| 905565   | 5,5 x 61        | TX25  | 36 – 40              | 200 |



#### ADVANTAGES / PROPERTIES

- Limited resistance to acid
- Suitable for use with woods containing tanning agents such as cumarú, oak, merbau, robinia, etc.
- Good resistance in moderately aggressive, non-chlorinated environments
- Suitable for saline atmospheres
- Stainless steel in accordance with DIN 10088

### APPLICATION IMAGE



The profile drilling screw, stainless steel A4 is screwed into the terrace decking made of Itaúba.

# VISIBLE FASTENING

## ITAÚBA

### ACCESSORIES FOR DIRECT/VISIBLE FASTENING

#### DISTANCE STRIP 2.0

For a visible fastening of boards, two screws must be used for board widths of 80 mm or more in the case of UK wood and UK aluminium profiles. The problem with this is that the screws work against each other when the wood expands or contracts, and this can quickly result in shearing of the screws.



| Art. no. | Dimensions [mm] <sup>a)</sup> | Material     | PU* |
|----------|-------------------------------|--------------|-----|
| 944803   | 30 x 700 x 7                  | Hard plastic | 50  |


<sup>a)</sup>Width x length x height

\*Screws are not included.

Fastening with Terrasotec screws Ø 4 mm.

#### SHEARING


For this reason, Dista strips 2.0 should always be used for wood substructures or aluminium profiles with no screw channels in order to give screws enough clearance and minimise the risk of shearing.

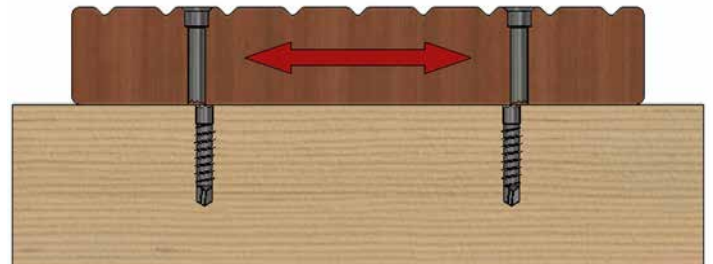

### TERRASOTEC

Suitable for distance strip 2.0.

| Art. no. | Dimensions [mm] | Drive | PU  |
|----------|-----------------|-------|-----|
| 905535   | 4,0 x 40        | TX15● | 500 |



#### ADVANTAGES / PROPERTIES

- Limited resistance to acid
- 10 years experience without corrosion problems with suitable woods
- Not suitable for woods containing high amounts of tanning agents, such as cumarú, oak, merbau, robinia, etc.
- Not suitable for use in chlorous atmospheres
- Stainless steel in accordance with DIN 10088
- 50% greater breaking torque than A2 and A4
- Magnetizable

## VISIBLE FASTENING

### DETERMINE THE NECESSARY SCREW LENGTH

To determine the correct screw length for your particular terrace structure, a guide based on the professional rules of the carpentry trade is shown below.

### TERRACES WITH WOOD SUBSTRUCTURE AND DISTA STRIP 2.0

To fasten terrace boards to a substructure, it is essential to select the correct screw length; failure to do so can impair the stability and service life of the terrace. Generally, the length of the screw must be at least double the thickness of the fixture (in this case, the thickness of the terrace boards). The screwed-in thread length must also be at least four times the nominal screw diameter; in the case of coniferous timber like Douglas fir, however, we recommend a minimum screw depth of six times the nominal diameter.

### THE TOTAL LENGTH OF THE SCREW IS THEREFORE GUIDED BY THE FOLLOWING CRITERIA

## ITAÚBA

### GENERAL

Only screws with a nominal diameter of 5 mm or more are to be used for the fastening. In outdoor areas, moreover, hardened stainless steel is the minimum requirement for the screw steel (even A2 or A4 stainless steel may be required, depending on the environment in which the terrace will be built).

#### Total length of screw

→ At least 2 x board thickness plus height of the Dista strip 2.0

#### Thread length in substructure

→ At least 4 x nominal screw diameter

#### Example calculation

Board thickness (T): 24 mm, nominal screw diameter (d): 5 mm

Height of Dista strip (D): 7 mm

$(2 \times 24 \text{ mm}) + 7 \text{ mm} = 55 \text{ mm}$


$4 \times \varnothing 5 \text{ mm} = 20 \text{ mm}$

$24 \text{ mm} + 7 \text{ mm} + 20 \text{ mm} = 51 \text{ mm}$

$51 \text{ mm} < 55 \text{ mm}$

Minimum length of screw: 55 mm

→ Screw length to choose: **60 mm**

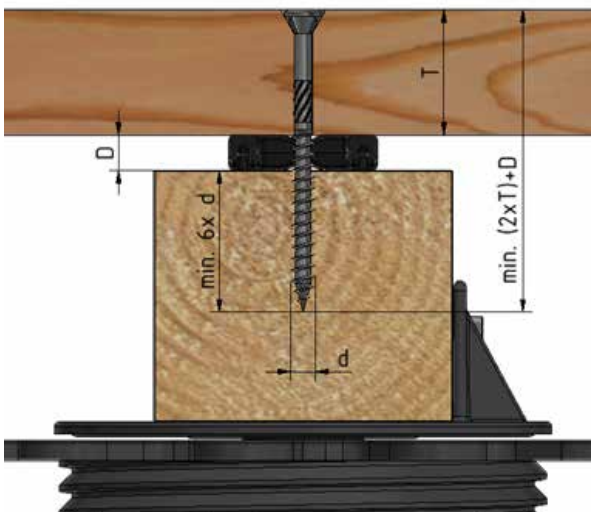



## VISIBLE FASTENING

## ITAÚBA

### TERRACES WITH WOOD SUBSTRUCTURE AND DISTA STRIP 2.0

At this point it must be stressed that Eurotec does not recommend a terrace construction of this kind. This is because direct contact between the wood substructure and the boards creates a very large area in which waterlogging can form. As a result of this, the wood will rot and the service life of the terrace will be shortened significantly.

If you wish to go ahead with such a structure anyway, however, the requisite screw length is calculated as follows:

#### Total length of screw

→ At least 2 x board thickness

#### Thread length in substructure

→ At least 4 x nominal screw diameter

#### Example calculation

Board thickness (T): 24 mm, nominal screw diameter (d): 5 mm

$(2 \times 24 \text{ mm}) = 48 \text{ mm}$


$4 \times \varnothing 5 \text{ mm} = 20 \text{ mm}$

$24 \text{ mm} + 20 \text{ mm} = 44 \text{ mm}$

$48 \text{ mm} > 44 \text{ mm}$


Minimum length of screw: 48 mm

→ **Minimum screw length to choose: 50 mm**

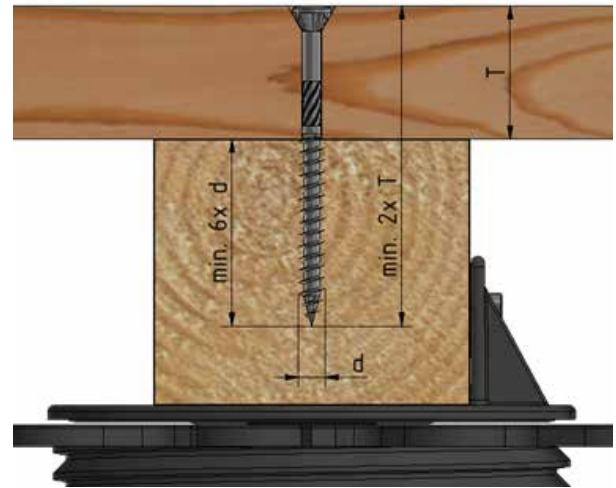

### TERRACES WITH ALUMINIUM SUBSTRUCTURE

Our profile drilling screw has been specially designed to fasten terrace boards on our aluminium system profiles. As a result, the screw length for this product is directly assigned to board thickness.

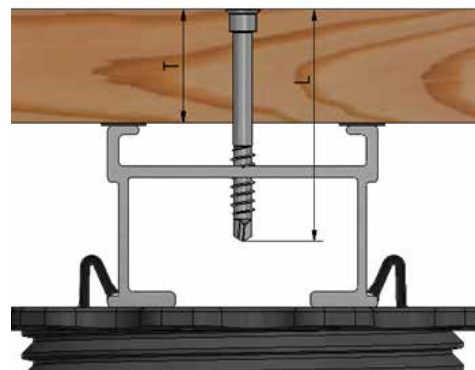

| Profile drilling screw |         |
|------------------------|---------|
| L [mm]                 | T [mm]  |
| 41                     | 16 – 20 |
| 46                     | 21 – 25 |
| 51                     | 26 – 30 |
| 56                     | 30 – 36 |
| 61                     | 36 – 40 |

# VISIBLE FASTENING

# ITAÚBA

## THREAD LENGTH OF SCREWS

| Terrasotec |         |
|------------|---------|
| L [mm]     | Lg [mm] |
| 45         | 26      |
| 50         | 30      |
| 60         | 35      |
| 70         | 40      |
| 80         | 50      |
| 90         | 55      |
| 100        | 60      |

| Hapatec |         |
|---------|---------|
| L [mm]  | Lg [mm] |
| 45      | 26      |
| 45      | 28      |
| 50      | 30      |
| 60      | 36      |
| 70      | 42      |
| 80      | 48      |
| 90      | 54      |
| 100     | 60      |

| Profile drilling screw |         |
|------------------------|---------|
| L [mm]                 | Lg [mm] |
| 41                     | 21      |
| 46                     | 21      |
| 51                     | 21      |
| 56                     | 21      |
| 61                     | 21      |


L = nominal length of screw

Lg = thread length of screw

## NUMBER OF SCREWS AND POSITION ACCORDING TO BOARD THICKNESS

For boards with a thickness of less than 80 mm, one screw per strand of the substructure is sufficient for fastening. Two screws must be used where the thickness is 80 mm or more.

The positions of the screws are determined by Eurocode 5 to ensure the longest possible service life of the connection elements used and the components affixed. For this reason we recommend a minimum spacing of 12 x the nominal diameter of the screw between screws and a spacing of 5 x the nominal diameter of the screw to the edge. (See illustration)

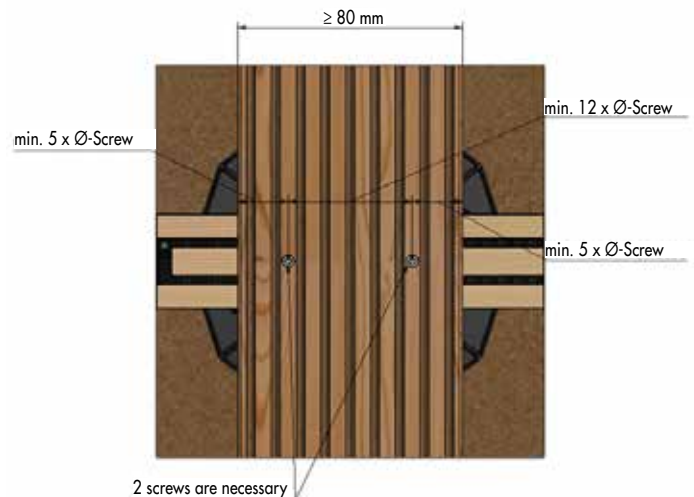

## NOTES

To establish a crossed connection between the board and the substructure, it makes sense to use a minimum board width of 110 mm; otherwise the axis and edge distances may not be maintained.

If you are not familiar with how this product is used, and particularly with the product's intended use, please contact our Application Technology department (technik@eurotec.team).