




# Concrete frame screw

Countersunk head and cylinder head




## Application

- Pilot-drill the frame to  $\text{Ø } 6,2 \text{ mm}$ ; insert and align window
- Pilot-drill the anchoring surface to  $\text{Ø } 6,0$ ; screw in concrete frame screws

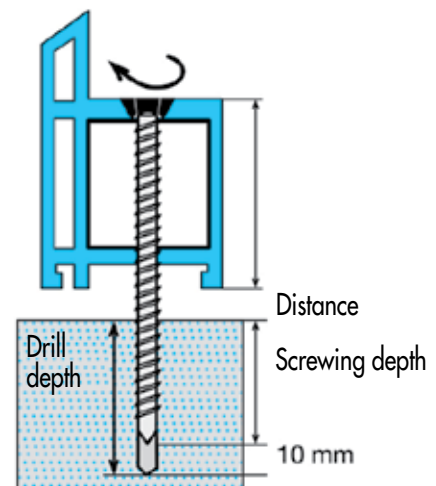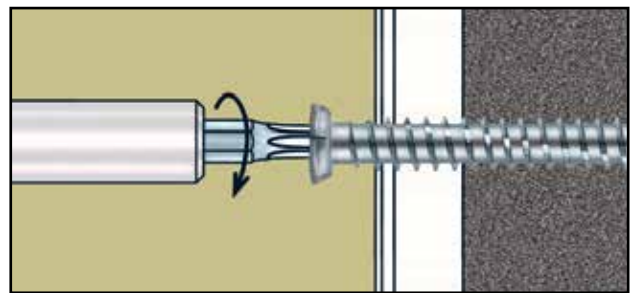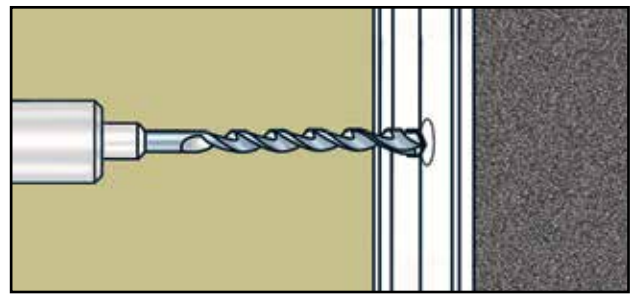


## Concrete frame screw

Countersunk head, Case-hardened steel

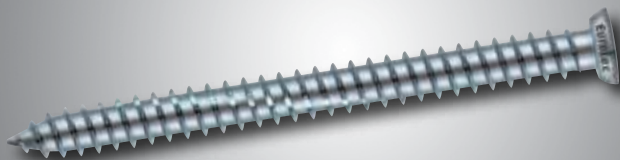

## Concrete frame screw

Cylinder head, Case-hardened steel

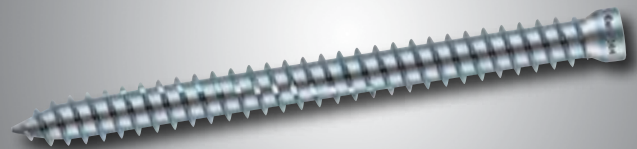

Art. no.	Dimensions (mm)	Drive	Head-Ø (mm)	PU
B110061	7,5 x 42	TX30 ●	11	100
B900903	7,5 x 52	TX30 ●	11	100
B900620	7,5 x 62	TX30 ●	11	100
B110062	7,5 x 72	TX30 ●	11	100
B900621	7,5 x 82	TX30 ●	11	100
B110063	7,5 x 92	TX30 ●	11	100
B900896	7,5 x 102	TX30 ●	11	100
B110064	7,5 x 112	TX30 ●	11	100
B900724	7,5 x 122	TX30 ●	11	100
B110065	7,5 x 132	TX30 ●	11	100
B110066	7,5 x 152	TX30 ●	11	100
B110067	7,5 x 182	TX30 ●	11	100
B110068	7,5 x 212	TX30 ●	11	100
B944642	7,5 x 232	TX30 ●	11	100
B944638	7,5 x 252	TX30 ●	11	100
B944643	7,5 x 272	TX30 ●	11	100
B944639	7,5 x 302	TX30 ●	11	100
B944641	7,5 x 342	TX30 ●	11	100
B944644	7,5 x 372	TX30 ●	11	100
B944645	7,5 x 402	TX30 ●	11	100

Art. no.	Dimensions (mm)	Drive	Head-Ø (mm)	PU
B110069	7,5 x 42	TX25 ●	7,5	100
B944847	7,5 x 52	TX25 ●	7,5	100
B900905	7,5 x 62	TX25 ●	7,5	100
B110070	7,5 x 72	TX25 ●	7,5	100
B900906	7,5 x 82	TX25 ●	7,5	100
B110071	7,5 x 92	TX25 ●	7,5	100
B900907	7,5 x 102	TX25 ●	7,5	100
B110072	7,5 x 112	TX25 ●	7,5	100
B900725	7,5 x 122	TX25 ●	7,5	100
B110073	7,5 x 132	TX25 ●	7,5	100
B110074	7,5 x 152	TX25 ●	7,5	100
B110075	7,5 x 182	TX25 ●	7,5	100
B110076	7,5 x 212	TX25 ●	7,5	100
B901087	7,5 x 42	TX30 ●	8,5	100
B900023	7,5 x 62	TX30 ●	8,5	100
B900017	7,5 x 72	TX30 ●	8,5	100
B900018	7,5 x 82	TX30 ●	8,5	100
B900019	7,5 x 92	TX30 ●	8,5	100
B900021	7,5 x 102	TX30 ●	8,5	100
B900024	7,5 x 112	TX30 ●	8,5	100
B900020	7,5 x 122	TX30 ●	8,5	100
B900025	7,5 x 132	TX30 ●	8,5	100
B900707	7,5 x 152	TX30 ●	8,5	100
B900383	7,5 x 182	TX30 ●	8,5	100
B901034	7,5 x 212	TX30 ●	8,5	100
B944636	7,5 x 252	TX30 ●	8,5	100
B944637	7,5 x 302	TX30 ●	8,5	100




# Window construction screws

For timber windows or plastic/aluminium windows


## FEBOTEC TX15

Ornamental head, intercoat

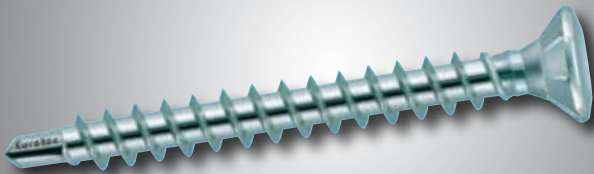

## FEBOTEC TX15

Ornamental head, intercoat

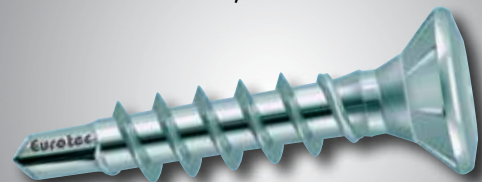

Art. no.	Dimensions (mm)	Drive	PU 1	PU 2
i944847	3,5 x 20	TX15 ●	1000	10000
i111545	4,0 x 25	TX15 ●	1000	10000
i111546	4,0 x 30	TX15 ●	1000	10000
i111547	4,0 x 35	TX15 ●	1000	5000
i111548	4,0 x 40	TX15 ●	1000	5000
i903414	4,5 x 30	TX15 ●	1000	5000
i903413	4,5 x 40	TX15 ●	1000	5000
i903515	5,0 x 25	TX15 ●	1000	5000
i903516	5,0 x 30	TX15 ●	1000	5000
i904009	5,0 x 40	TX15 ●	1000	5000

**Fastening mountings and bearings to timber profiles with reduced splitting effect**

**Fields of application: timber windows**

- Drill point prevents cracking in the timber
- No need to change bits
- Restraining ribs stop the screws at an appropriate tightening torque for the screw
- All screws are perfectly adapted to their application thanks to the head geometry

Art. no.	Dimensions (mm)	Drive	PU 1	PU 2
i900463	4,2 x 20	TX15 ●	1000	5000
i900464	4,2 x 13	TX15 ●	1000	5000

**Fastening of mountings or hinges with reduced splitting effect Fields of application: plastic and aluminium windows**

- Optimum thread means no more stripping
- No need to change bits
- Restraining ribs ensure a smooth transition when screwed in
- With drill point and coarse thread
- Speed approx. 200 to 400 rpm. 7 mm head Ø for mountings

**Please note:**


The correct torque setting must be ensured when using compressed-air/cordless screwdrivers.

If the setting is incorrect, there is a risk of breaking and over-tightening the screws.



## FeboTec ALU

Ornamental head, intercoat with drill point and restraining ribs

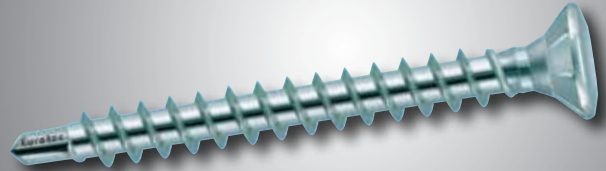

Art. no.	Dimensions (mm)	Drive	Head-Ø (mm)	PU
i100050	4,2 x 16	TX15 ●	7,0	10000
i100051	4,2 x 19	TX15 ●	7,0	10000
i100052	4,2 x 22	TX15 ●	7,0	10000
i100053	4,2 x 25	TX15 ●	7,0	10000
i100054	4,2 x 30	TX15 ●	7,0	10000
i100055	4,2 x 35	TX15 ●	7,0	10000
i100056	4,2 x 40	TX15 ●	7,0	10000
i944796	4,6 x 10	TX15 ●	8,5	10000
i944811	4,6 x 13	TX15 ●	8,5	10000
i944812	4,6 x 16	TX15 ●	8,5	10000
i944809	4,6 x 19	TX15 ●	8,5	10000
i944810	4,6 x 25	TX15 ●	8,5	10000
i100057	4,6 x 30	TX15 ●	8,5	10000
i100058	4,6 x 40	TX15 ●	8,5	10000

**Please note:**

The correct torque setting must be ensured when using compressed-air/cordless screwdrivers.

If the setting is incorrect, there is a risk of breaking and over-tightening the screws.